


1 LAYOUT PLAN WITH LABELS
C-2 SCALE: 1" = 10'-0"

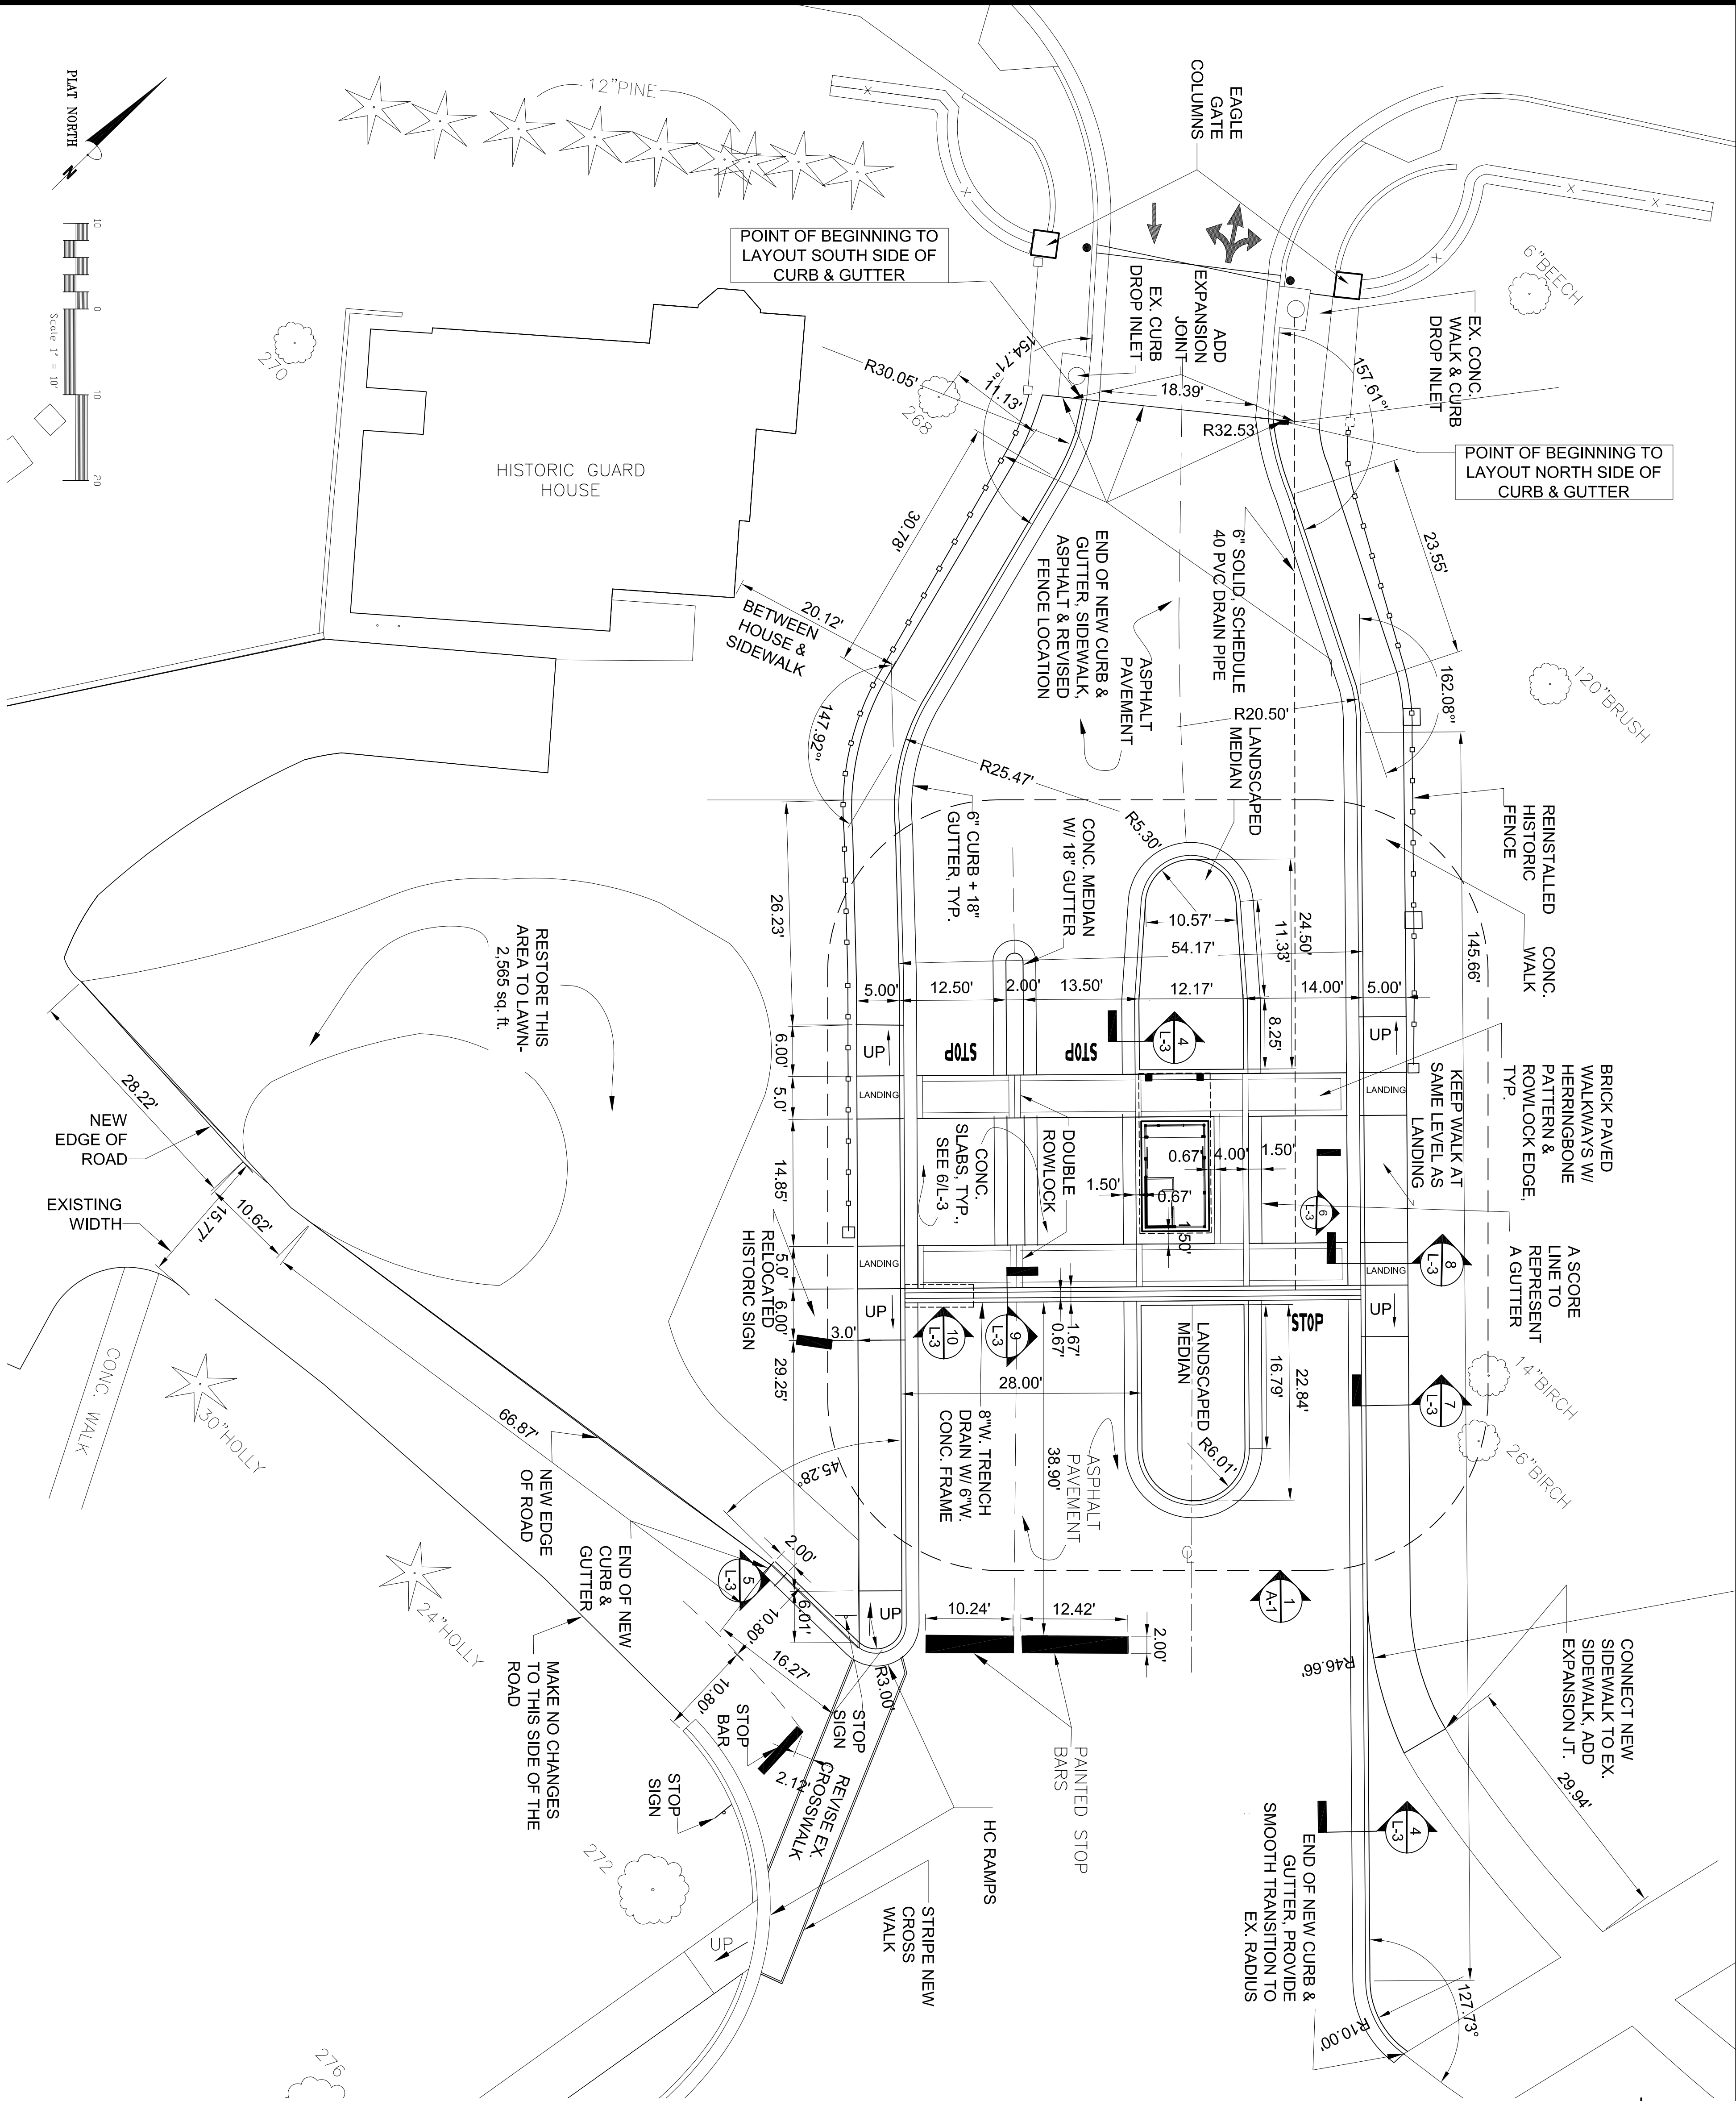

LAYOUT NOTES

1. Dimensions are to back of curb, edge of building or end of pavement.
2. All angles are 90 degrees unless otherwise noted.
3. Underground utilities are not shown on this sheet to improve clarity. The contractor may request a print showing the underground utilities. Refer to the survey for the location of underground utilities.
4. Contractor shall verify the final location of the Armed Forces Retirement Home or the appropriate utility company listed on the survey.
5. Backfill behind curbs. Transition fill to existing grades.
6. Locate historic fence at back of sidewalk.
7. Refer to Architectural drawings for security layout and details within the area of the Guard Building.
8. Top of Curbs are 6" wide unless noted otherwise on the drawings.
9. Broom finish the concrete surfaces of the sidewalk and concrete slabs. Cure concrete to 3,000 psi.
10. Provide Control Joints every 5' on the sidewalk and Expansion Joints every 30' for the sidewalk and the curb & gutter.
11. Pavement Design:
 - 8" Base Course: SF9.3A (Type A or C Crush n Run)
 - 2" Base Course: SF9.5A (Superpave)
 - 2" Surface Course: SF9.5A (Superpave)

INTECaec

2500 Brighton Dam Road, Brookeville, Maryland 20833
p. 301.570.4100 f. 301.570.4101 www.INTECaec.com

ARMED FORCES RETIREMENT HOME
EAGLE GATE RENOVATION
3700 NORTH CAPITOL STREET N.W. WASHINGTON D.C 20317

LAYOUT PLAN WITH LABELS
CIVIL

REV.	DESCRIPTION	DATE

DESIGNED: PL	DRAWN:
REVIEWED: SK	JOB #: 210005
SCALE: 1"=10'-0"	DATE: 00-00-0000
C-2	SHEET 4 OF 11